



# RUBBER ROLLERS AND PULLEYS

Sioux Rubber & Urethane applies rubber coatings or lagging to virtually any size pulley or roller. Our rubber lagging is vulcanized on to the pulley or roller resulting in a bond that will not pull loose even under extreme conditions (unlike many glued-on materials). Sioux Rubber & Urethane can also strip and recoat your existing rollers at our facility with quick turn around times.


Whether it's a completely new roller or recovering your existing core, Sioux Rubber & Urethane can accommodate most any need and size:

- Coatings available from 0.063" and up in thickness
- Capable of covering rollers up to a 60" diameter and 20' length
- Crowned and/or grooved finishes available
- Fast turn around on all orders
- Special materials or configurations available upon request


A variety of rubber compounds are available to meet your specific service requirements. Even multi-layer applications are available, such as a cushioning soft under-layer with harder rubber on outside surface.




Natural Rubber w/ Dual Taper

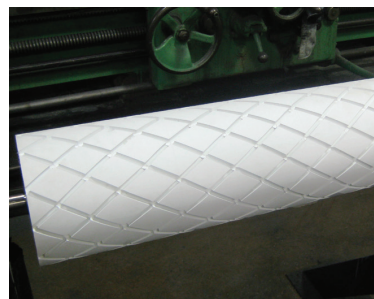

White Food Grade Neoprene w/ Diamond Design

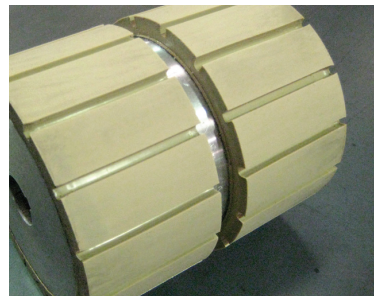

Gum Rubber w/ Grooves

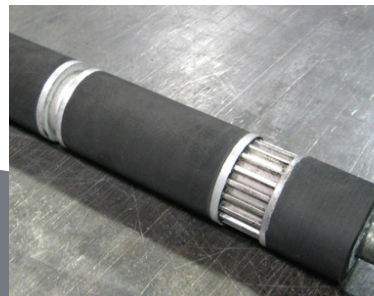

SBR Covering



PROTECT  
IT WITH  
RUBBER

2620 HAWKEYE DRIVE, SIOUX  
CITY, IOWA 51105

FAX: 712-252-3258

TEL: 1-800-443-9469

TEL: 712-252-3257

SUBMIT A QUOTE REQUEST AT:  
[WWW.SIOUXRUBBER.COM](http://WWW.SIOUXRUBBER.COM)